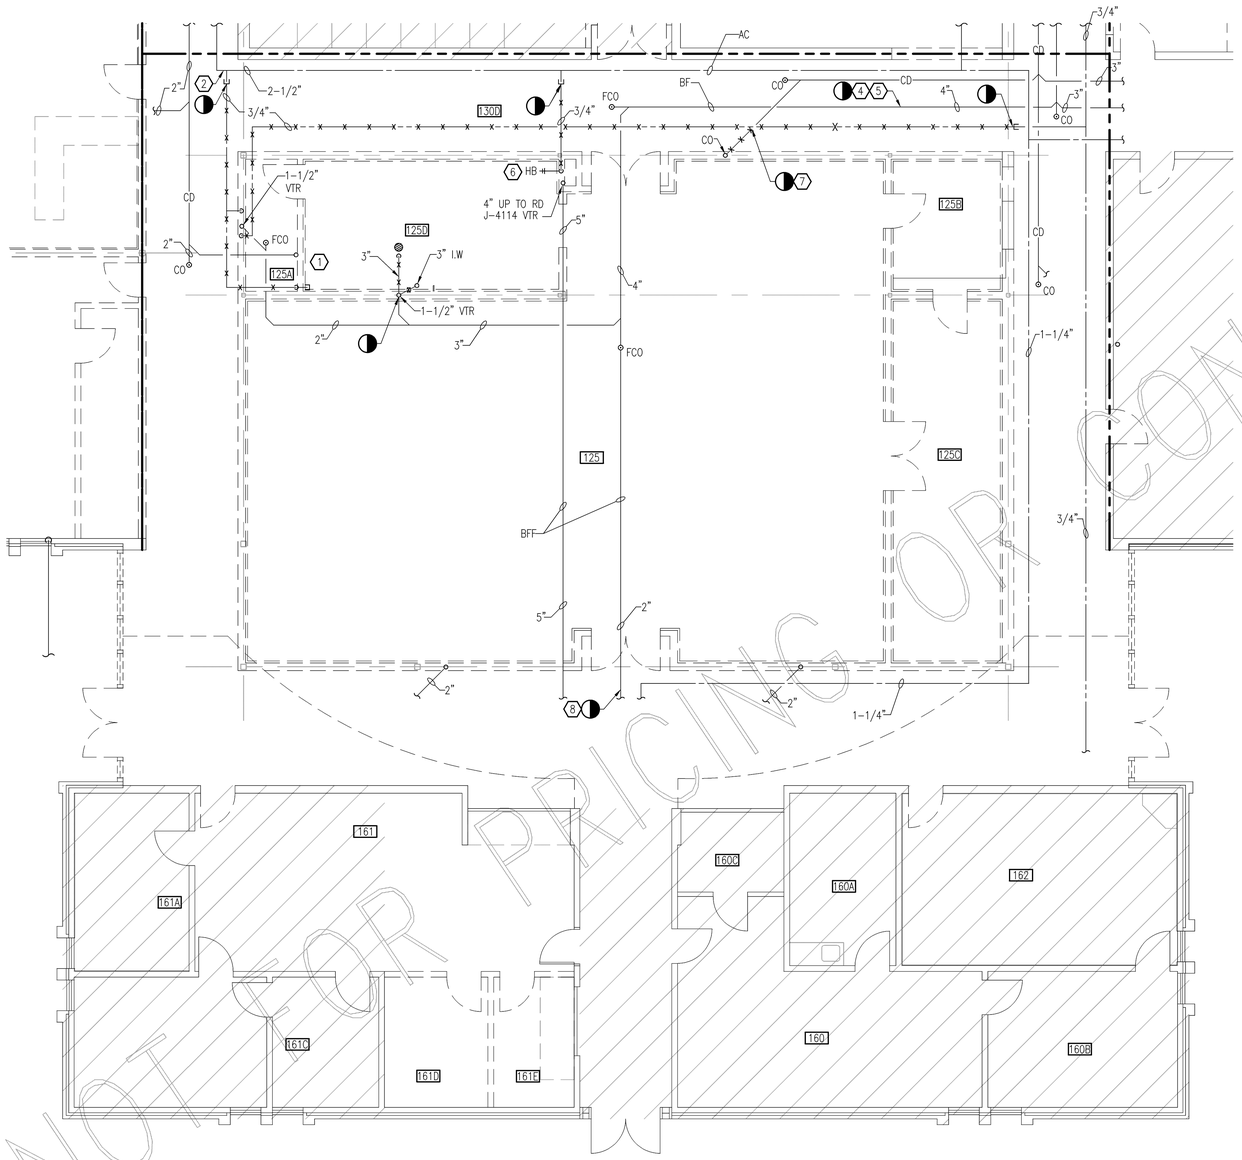


WARSAW CAMPUS PLUMBING DEMOLITION FLOOR PLAN
SCALE: 3/16" = 1'-0"

## NOTES THIS SHEET

1. REMOVE AND DISPOSE EXISTING PIPE TO VENDING WATER SUPPLY.
2. DRAIN COLD WATER PIPE FOR PREPARATION FOR NEW ISOLATION VALVE–REFER TO NEW WORK PLANS.
3. REMOVE FIXTURE AND ASSOCIATED PIPING AS SHOWN, CAP DRAIN BELOW FLOOR, REMOVE TRAP IF FIXTURE IS A FD.
4. ACTIVE WASTE TO REMAIN IN OPERATION SCHEDULE SHUTDOWN TO PERFORM TIE IN. REFER TO NEW WORK PLAN.
5. LOCATION OF NEW CONNECTION FOR SANITARY WASTE REFER TO NEW WORK PLANS.
6. REMOVE HB AND ASSOCIATED PIPE.
7. MOVE CONDENSATE IN TO NEW WALL AND CONNECT AS SHOWN. REFER TO NEW WORK PLAN P1.6W.
8. LOCATION OF NEW POINT OF CONNECTION SAW CUT FLOOR, ACTIVE WASTE TO REMAIN IN OPERATION SCHEDULE SHUTDOWN TO PERFORM TIE IN. REFER TO NEW WORK PLAN.

### SAW CUT NOTE:

CONTRACTOR SHALL SAW CUT, REMOVE & PATCH CONCRETE FLOOR AS REQUIRED TO PERFORM WORK INDICATED. PATCH FLOOR TO MATCH ADJACENT EXISTING CONDITIONS. CONTRACTOR SHALL VERIFY PIPE INVERTS PRIOR TO SAW CUTTING.

### NOTE TO CONTRACTOR

ALL EXISTING PIPE TO REMAIN UNLESS OTHERWISE NOTED. DISPOSE OF ALL PIPE AND FIXTURES REMOVED, UNLESS OTHERWISE NOTED.

### ASBESTOS AND LEAD PAINT NOTE

AN ASBESTOS INSPECTION WAS PERFORMED AND ASBESTOS CONTAINING MATERIALS WERE FOUND GENERALLY IN THE AREAS INDICATED IN THE ASBESTOS SURVEY/INSPECTION REPORT WHICH IS AVAILABLE TO THE CONTRACTOR(S) FOR HIS INFORMATION. ASBESTOS CONTAINING MATERIALS HAVE BEEN REMOVED UNDER A SEPARATE CONTRACT.

A LEAD–BASED PAINT INSPECTION WAS PERFORMED AND LEAD–BASED PAINT WAS FOUND IN THE AREAS INDICATED. THE CONTRACTOR SHALL BE RESPONSIBLE WITH ALL REQUIREMENTS OF THE VIRGINIA OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS LEAD–BASED PAINT PROTECTION OF WORKERS.

### NOTE TO CONTRACTOR:

INSULATED ETR PIPE IS NOT TO BE DISTURBED, CONTRACTOR SHALL REPAIR AND SEAL ANY INSULATION DAMAGED DURING CONSTRUCTION.



KEYPLAN
NO SCALE

Pace COLLABORATIVE
MECHANICAL ELECTRICAL ENGINEERS
VIRGINIA BEACH, VA • 757-499-7229

GRAPHIC SCALES
3/16" = 1'-0" 0' 5' 10' 20'

NOT FOR PRICING OR CONSTRUCTION

nbj ARCHITECTURE
A Professional Limited Company
GROVE PARK SQUARE
11537-B NUCKOLS ROAD
Richmond, Virginia 23059
(804) 273-9811 fax: (804) 273-9843

RAPPAHANNOCK COMMUNITY COLLEGE
CAMPUS RENOVATIONS
WARSAW + GLENNS, VIRGINIA
PC: 260-17712

WARSAW CAMPUS PLUMBING DEMOLITION FLOOR PLAN

Date: JANUARY 13, 2010

REVISIONS

| NO. | DATE |
|---|---|
| | |

COMMONWEALTH OF VIRGINIA
JOHN M. NEVELL
Lic. No. 033329
01.13.10
PROFESSIONAL ENGINEER

Sheet
PD1.6W

File Number
9004